








# MR-1

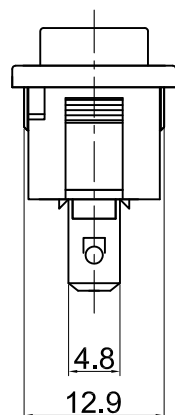


Rating: 10A 125V AC (UL CUL )   
 6A 250V AC (UL CUL VDE CB)   
 Contact Resistance: 50mΩ Max  
 Insulation Resistance: DC 500V 100MΩ Min  
 Dielectric Strength: AC1500V 1 minute  
 Electrical life: 10,000 cycles  
 Operating Temperature: 0°C ~85°C



### CUT-OUT



	X	Y
0.75~1.25	19.2 <sup>+0.1</sup> <sub>-0.0</sub>	12.9 <sup>+0.15</sup> <sub>-0.00</sub>
1.25~2.00	19.4 <sup>+0.1</sup> <sub>-0.0</sub>	12.9 <sup>+0.15</sup> <sub>-0.00</sub>
2.00~3.00	19.8 <sup>+0.1</sup> <sub>-0.0</sub>	12.9 <sup>+0.15</sup> <sub>-0.00</sub>



### MATERIAL:

Body:Nylon66,UL rated:94V-2 min  
 Actuator:Nylon66,UL rated:94V-2 min  
 Terminal:Brass,silver or tin plated

X	0	1	2	3	4	5	7	8	9	A	B	C	D	E	G
Marking	none	•	ON OFF	≡	⊖	⊙	ON/开 OFF/关	⚡	I/O	💡	⊖	⊖	⊖	开 关	⊖

				公差 TOLERANCES		.X±0.3		.XX±0.15		角度 ANGLE ±1°		单位 DIMENSION UNIT mm.			
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.07.17	品名 TITLE		图号 DRAWING NO			
				核准		核对		绘图		MR-1-119-C2N-BRAAE		MR-1-119-C2N-BRAAE_A1			
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY							
A1	重新整理后发行	2020.07.17	N/A												